



LIGHTS CATALOG

REMOTE AREA LIGHTING SYSTEMS

SMALL LIGHTS

MEDIUM LIGHTS

LARGE LIGHTS

TACTICAL LIGHTS

HEADLAMPS

RIGHT ANGLE LIGHTS

DIVE LIGHTS

SPECIALTY LIGHTS





DEAR CUSTOMER,

Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of advanced lighting systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (see page 2) and continue to increase the number of industry leading safety certificates for specific models.

Our new lighting catalog features multiple technology advances. These include state of the art LED performance upgrades, new electronic features, upgraded safety certificates and enhanced packaging. We are committed to environmentally responsible manufacturing, in fact most of our lights use LED bulbs that help protect our planet. LEDs are long lasting, promote extended battery life and allow for the latest technological advancements.

From basic models to the high-performance 9410L LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican's industry-leading guarantee of excellence.

We invite you to look through our new catalog and discover the ideal lighting tools for your specific needs.

CEO and President
Lyndon Faulkner

MARKETS SERVED//

**Fire
Military
Industrial
Law Enforcement
Outdoor
Consumer
Dive**



TABLE + OF CONTENTS

Performance & Safety	2-3
Remote Area Lighting Systems	4-7
Small Lights	8-9
Medium Lights	10-13
Large Lights	14-15
Tactical Lights	16-17
Headlamps	18-21
Right Angle Lights	22-25
Dive Lights	26-27
Specialty Lights	28-29
Light Mounting Systems Holster and Holder Styles	30-31
Specifications	32-35
Custom Labels Lighting Features	36-37

TABLE OF CONTENTS

www.pelican.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

PELICAN + LIGHTS

PRODUCT LIGHTS OVERVIEW

REMOTE AREA LIGHTING SYSTEM PGS 04 - 07



SMALL LIGHTS PGS 08 - 09



MEDIUM LIGHTS PGS 10 - 13



LARGE LIGHTS PGS 14 - 15



TACTICAL LIGHTS PGS 16 - 17




HEADLAMPS PGS 18 - 21




RIGHT ANGLE LIGHTS PGS 22 - 25



DIVE LIGHTS PGS 26 - 27

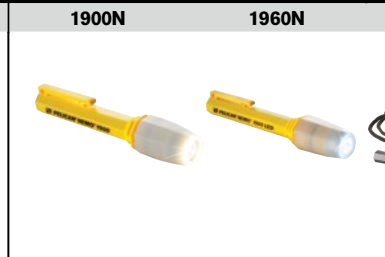

SMALL LIGHTS PGS 08-09

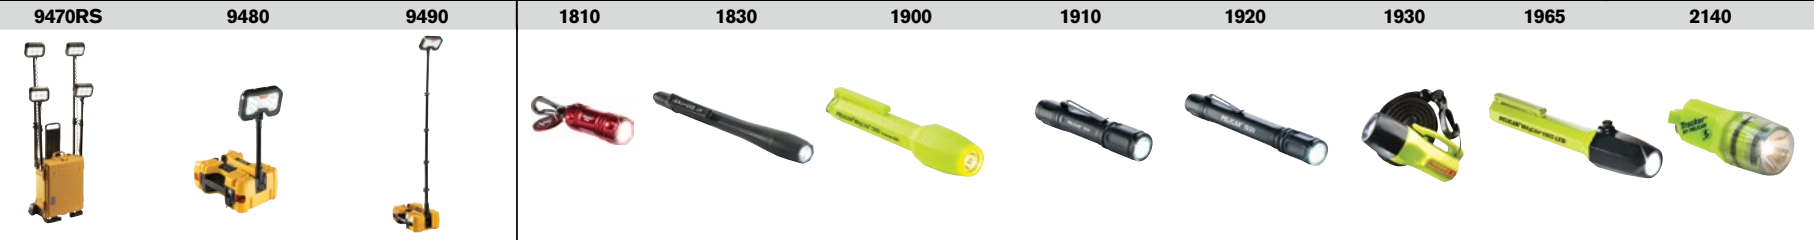

RIGHT ANGLE LIGHTS PGS 22 - 25



SPECIALTY LIGHTS PGS 28 - 29



PERFORMANCE

STANDARDS AND RATINGS

(Applicable to flashlights only)

LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon “on a clear night in an open field”).

PEAK BEAM INTENSITY


Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.

WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. **Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

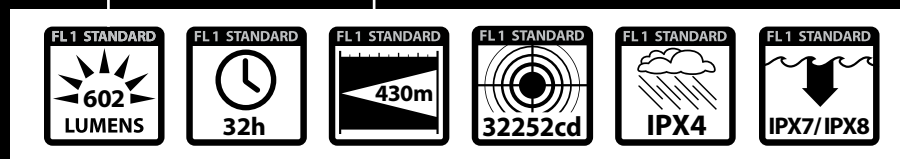

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the flashlight industry, developed

performance standards and symbols to effectively communicate a flashlight's features and benefits.

The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

GLOSSARY OF TERMS

Candela A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.


Lux The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

Lumen A unit of measurement of the amount of brightness that comes from a light source. Lumens define “luminous flux,” which is energy within the range of frequencies we perceive as light.


Integrating Sphere An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (Ingress Protection) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

Rechargeable Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon. 

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

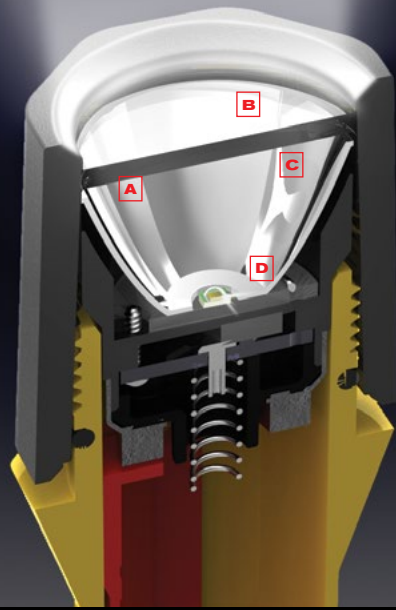

NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B Robust, over-molded polycarbonate lens won't yellow
- C Opti-mechanical design gathers and focuses 100% of the light
- D LED is mounted directly to the PCB board, creating a strong and efficient design solution



SAFETY.

YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS

Whether working in a **Class I** Oil Refinery or in the silo of a **Class III** Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools approved for any work environment. In fact we make more safety approved lights certified for **Class I II III Div. 1** and groups **ABCDEFG** than anyone else. To find the right light for your job visit us at Pelican.com/safety.

HAZARDOUS AREA ELECTRICAL GUIDELINES

	CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I	DIVISION 1	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
	DIVISION 2		
CLASS II	DIVISION 1	Combustible Dusts	Coal Mine, Munitions Factory Grain Silo, Hay Storage Facility
	DIVISION 2		
CLASS III	DIVISION 1	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility Textile Mill, Cotton Gin
	DIVISION 2		


Division 1 (hazard likely): Where volatile substances can exist all of the time or some of the time under normal operating conditions.
Division 2 (hazard not likely): Where volatile substances are not likely to exist under normal operating conditions.

RAALS

REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RAALS line is the modern alternative to generator based lighting:

- Silent performance
- No flammable fuel
- Eliminated trip hazards
- No exhaust fumes
- Remote activation

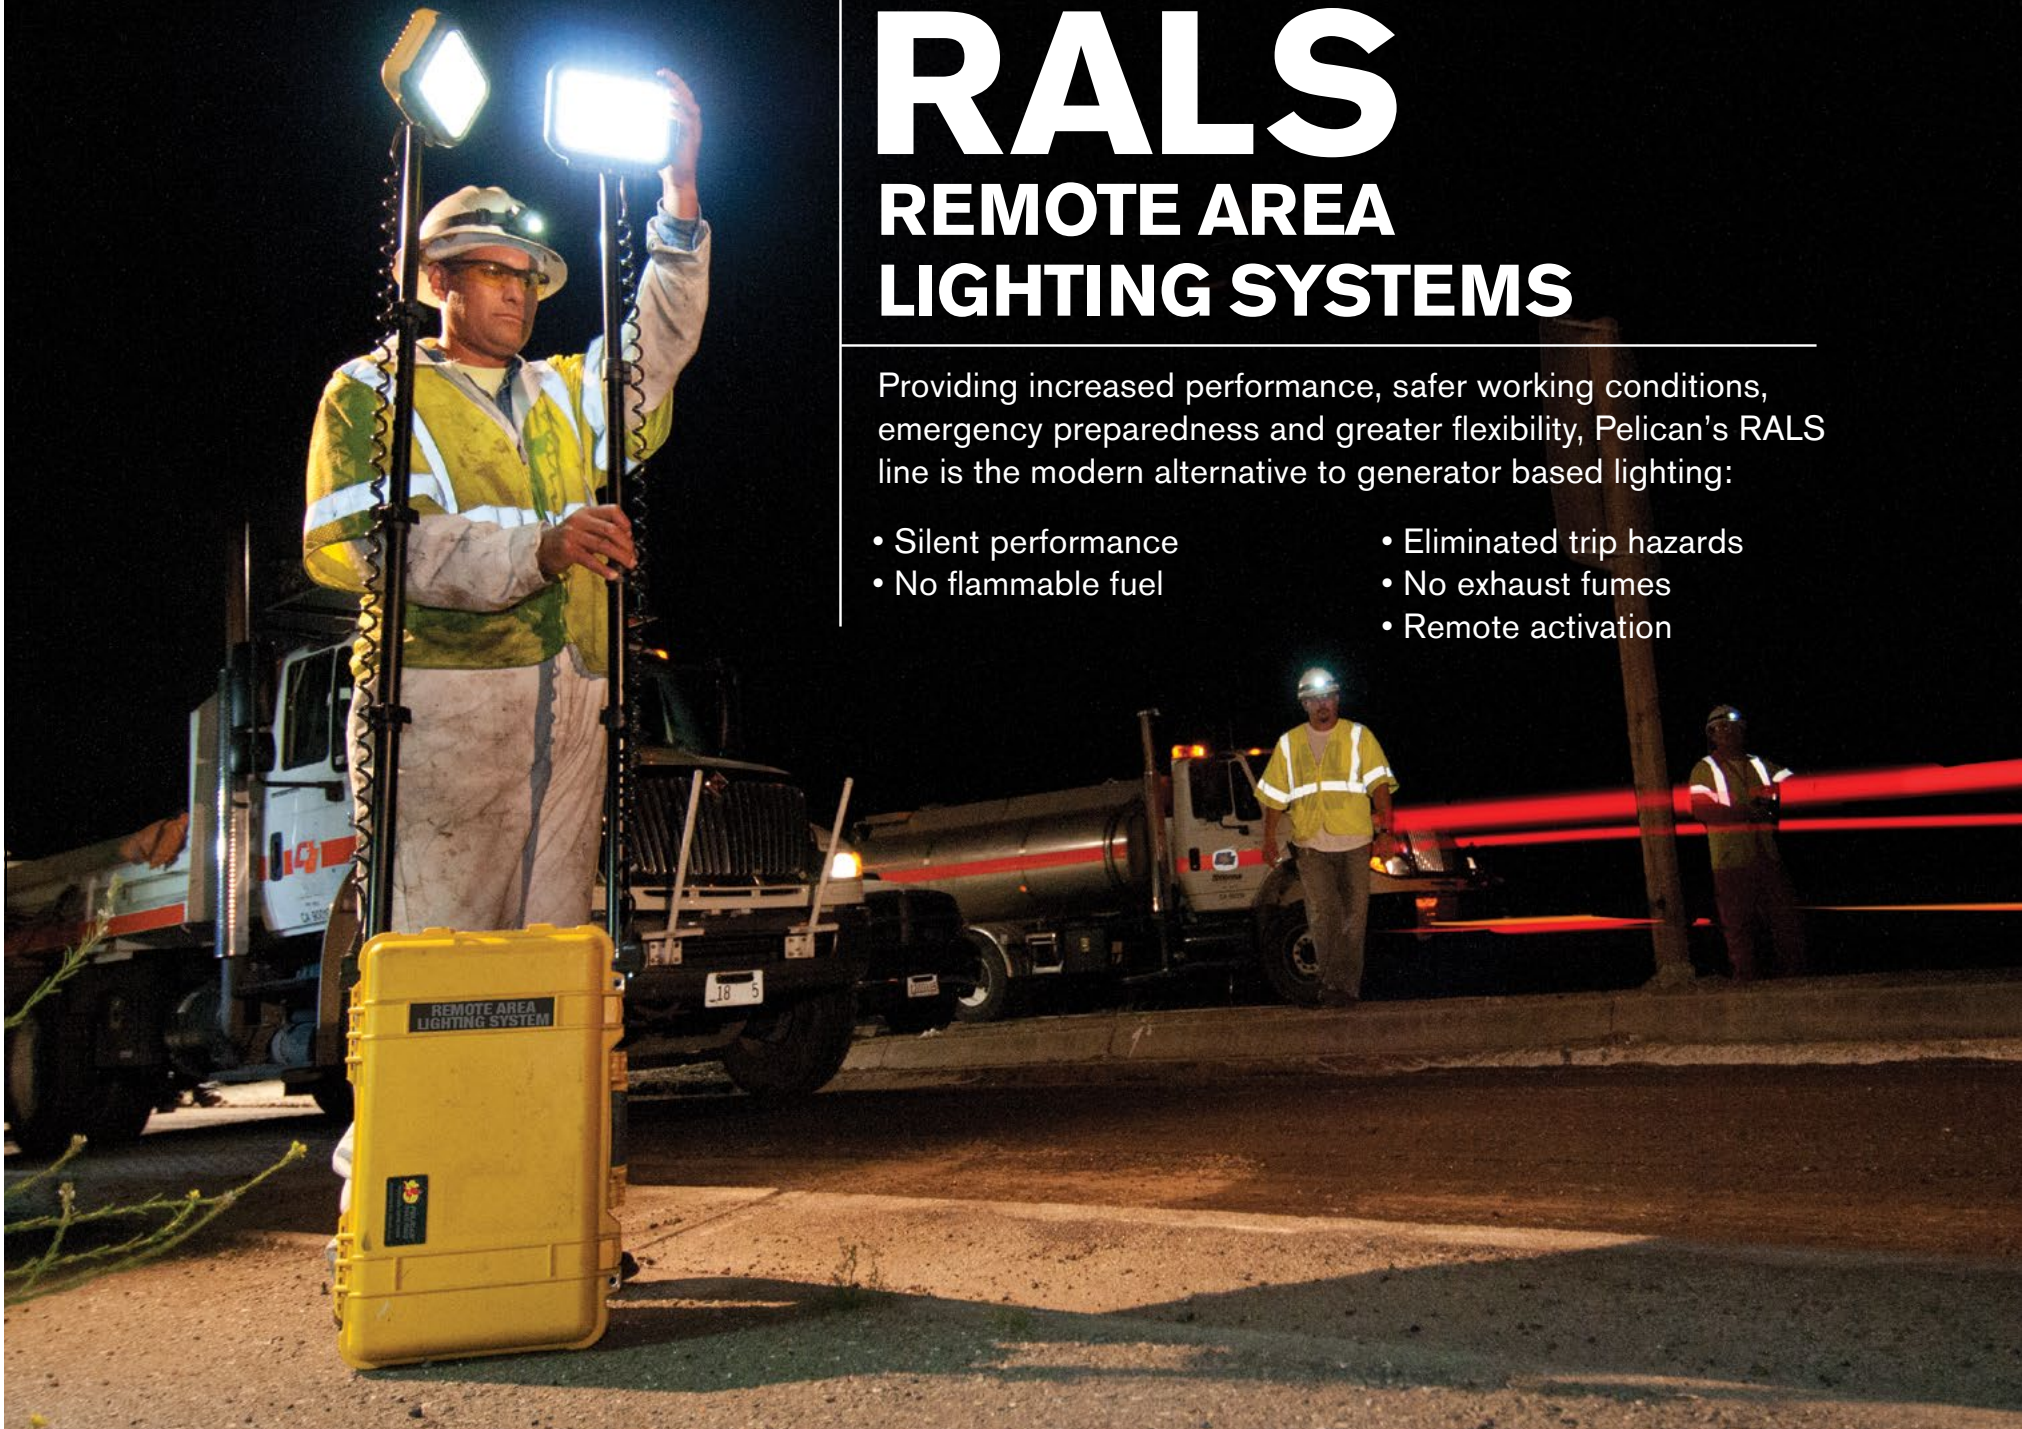

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

9000 RALS


LIGHT SOURCE LED

BATTERIES//4 AA Alkaline (included)

DIMENSIONS//8.00" x 5.00" x 2.25"
(20.3 x 12.7 x 5.7 cm)

MODES// High / Medium / Low

BEAM SPREAD// 110°, 2 LEDs



9420XL RALS


LIGHT SOURCE LED

BATTERIES//Lithium ion

DIMENSIONS//29" (73.6 cm) Closed,
62" (157.4 cm) Deployed

MODES// High / Low

BEAM SPREAD// 58°, 2 LEDs per head



9430 RALS


LIGHT SOURCE//LED

BATTERIES//Sealed Lead Acid

DIMENSIONS//15.75" (40 cm) Closed,
32.28" (82 cm) Extended

MODES// High / Low

BEAM SPREAD// 125°, 6 LEDs



9430SL SPOT LIGHT RALS


LIGHT SOURCE//LED

BATTERIES//Sealed Lead Acid

DIMENSIONS//15.75" (40 cm) Closed,
32.28" (82 cm) Extended

MODES// High / Low

BEAM SPREAD// 10°, 24 LEDs



9435 SAFETY LIGHT RALS

LIGHT SOURCE//LED

BATTERIES//NiMH

DIMENSIONS//15.75" (40 cm) Closed,
32.28" (82 cm) Extended

MODES// High / Low

BEAM SPREAD// 90°, 18 LEDs

CERTIFICATIONS// CI, D2



9440 RALS


LIGHT SOURCE//LED

BATTERIES//Lithium-Ion

DIMENSIONS//37.4"(95 cm) Closed,
85"(215.8 cm) Extended

MODES// High / Medium / Low

BEAM SPREAD// 120°, 10 LEDs



9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE//LED

INPUT VOLTAGE//12 - 30vdc or 110-240vac

DIMENSIONS//20.62"(52.4 cm) Closed, 157.5"(399.9 cm) Extended

LIGHT OUTPUT// 6000 (White LED) Per Head, 1200 (Red LED) Per Head


BEAM SPREAD// 210° Diffused, 36 LEDs per head 24 White/12 Red,

3 lamp heads

PELICAN CASE// Included



Select between white light or red night vision mode

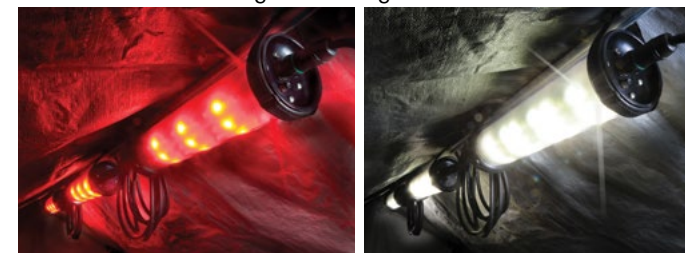

9460/9460RS RALS




LIGHT SOURCE// LED

BATTERIES// Sealed Lead Acid

DIMENSIONS// 22"(55.9 cm) Closed,
70.87"(179.9 cm) Deployed

MODES// Variable

BEAM SPREAD// 120°, 6 LEDs per head, 2 lamp heads



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9460

9460RS

9460RS, 9470RS FEATURES



12V POWER SUPPLY
12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps).



MULTI-TERRAIN TROLLEY
large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

9470/9470RS RALS




LIGHT SOURCE// LED

BATTERIES// Sealed Lead Acid

DIMENSIONS// 24.83"(63 cm) Closed, 72.85"(185 cm) Deployed

MODES// Variable

BEAM SPREAD// 120°, 6 LEDs per head, 4 lamp heads



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9470

9470RS



REMOTE CONTROL
allows for activation and deactivation from over 60 feet away.

9480 RALS


LIGHT SOURCE// LED

BATTERIES// Sealed Lead Acid

DIMENSIONS// 15.50 (39.4 cm) Closed, 23.75*(60.3 cm) Deployed

MODES// High/ Medium / Low / Flashing

BEAM SPREAD// 125°, 8 LEDs



NEW

Bluetooth™



SWAPPABLE POWER PACK

Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.

9490 RALS


LIGHT SOURCE// LED

BATTERIES// Sealed Lead Acid

DIMENSIONS// 20*(50.8 cm) Closed, 72*(182.9 cm) Deployed

MODES// High/ Medium / Low / Flashing / (6000-Variable)

BEAM SPREAD// 125°, 10 LEDs



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



NEW

Bluetooth™




BATTERY LEVEL INDICATOR

Full time battery level indication.



BLUETOOTH™ CONTROL

Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.

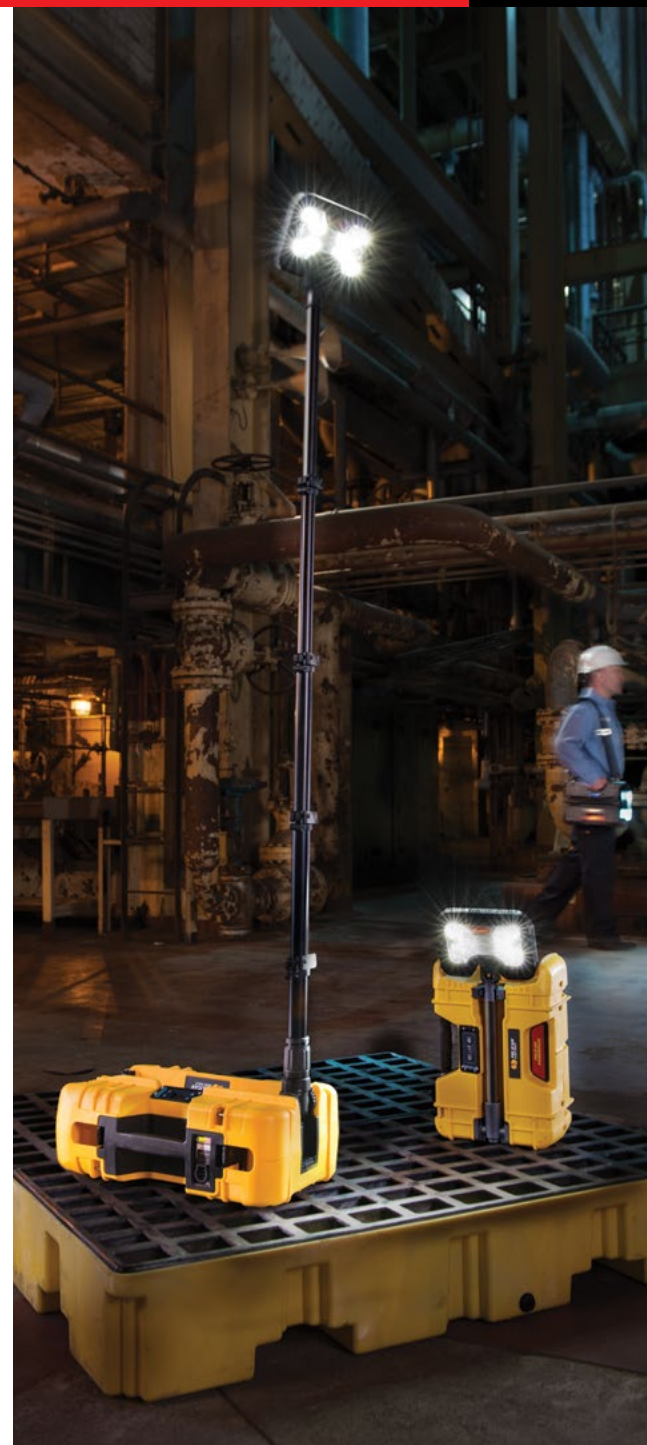

SMALL LIGHTS

When compact is a must or just a convenience, choose from Pelican's range of powerful lights. Whether composite or alloy, certified or colored, you'll find the perfect model for your next job.



1810

LIGHT SOURCE//


LED

BATTERIES//

4 LR 41 Alkaline (included)

LENGTH//

1.50" (3.8 cm)



L4™1830

LIGHT SOURCE//

LED

BATTERIES//

3 AAAA Alkaline (included)

LENGTH//

6.2" (15.7cm)

CERTIFICATIONS//

CI, D1



MITYLITE™1900

LIGHT SOURCE//

Incandescent (Xenon)

BATTERIES//

2 AAA Alkaline (included)

LENGTH//

4.09" (10.4cm)

CERTIFICATIONS//

CI, D1/CII, D2



SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

1910

LIGHT SOURCE//
LED

BATTERIES//
1 AAA Alkaline (included)

LENGTH//
3.8" (9.7cm)

MODES//
High / Low



LUMENS
72
RUN TIME
4h
UP TO

1920

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
5.5" (14.0cm)

MODES//
High / Low



LUMENS
120
RUN TIME
8h 30m
UP TO

L1™ 1930

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
2.64" (6.7cm)

CERTIFICATIONS//
CI, D1/CII, D2



LUMENS
12
RUN TIME
4h 15m
UP TO

MITYLITE™ 1965

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
5.48" (13.9cm)

CERTIFICATIONS//
CI II III, D1



LUMENS
21
RUN TIME
4h
UP TO

TRACKER™ 2140

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
3.5" (8.9 cm)

CERTIFICATIONS//
CI, D2



LUMENS
13
RUN TIME
2h
UP TO

VB3™ 2220

LIGHT SOURCE//
LED

BATTERIES//
2 CR2032 Lithium (included)

LENGTH//
3.5" (8.9cm)

CERTIFICATIONS//
CI, D1



LUMENS
9
RUN TIME
34h
UP TO

VB3™ 2220NV

LIGHT SOURCE//
Red LED

BATTERIES//
2 CR2032 Lithium batteries (included)

LENGTH//
3.5" (8.9cm)

CERTIFICATIONS//
CI, D1



MITYLITE™ 2300

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
5.62" (14.3cm)

CERTIFICATIONS//
CI, D1/CII, D2



LUMENS
11
RUN TIME
4h 30m
UP TO

MITYLITE™ 2340

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (not included)

LENGTH//
6.25" (15.9cm)

CERTIFICATIONS//
CI II, D2



LUMENS
10
RUN TIME
4h 30m
UP TO

MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your flashlight in an emergency.



PELILITE™ 1800

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 C Alkaline (not included)

LENGTH//
6" (15.2cm)

CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED	LUMENS
	21
	RUN TIME
	7h

SABRELITE™ 2000PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
3 C Alkaline (not included)

LENGTH//
7.79" (19.8cm)

CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED	LUMENS
	53
	RUN TIME
	5h

POCKET SABRE™ 1820

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 C Alkaline (included)

LENGTH//
5.83" (14.8cm)

CERTIFICATIONS//
CI II III, D2



SAFETY CERTIFIED	LUMENS
	22
	RUN TIME
	6h 45m

SABERLITE™ 2010

LIGHT SOURCE//
LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
8.11" (20.6cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS
	109
	RUN TIME
	32h

SABERLITE™ 2020

LIGHT SOURCE//
Recoil™ LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
8.75" (22.2cm)

CERTIFICATIONS//
CI, D1



SAFETY CERTIFIED	LUMENS
	75
	RUN TIME
	6h 30m

SABRELITE™ 2000

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
3 C Alkaline (not included)

LENGTH//
7.79" (19.8cm)

CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED	LUMENS
	53
	RUN TIME
	5h

SABERLITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
8.11" (20.6cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS
	109
	RUN TIME
	32h

STEALTHLITE™ 2400

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
6.49" (16.5cm)

CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED	LUMENS
	45
	RUN TIME
	3h 45m



MEDIUM LIGHTS



STEALTHLITE™ 2400PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
6.49" (16.5cm)

CERTIFICATIONS//
CI D1, CII D2



SAFETY CERTIFIED	LUMENS
	45
SAFETY CERTIFIED	RUN TIME
	3h 45m

MITYLITE™ 2430

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
6.50" (16.5cm)

CERTIFICATIONS//
CI, D2



SAFETY CERTIFIED	LUMENS
	70
SAFETY CERTIFIED	RUN TIME
	2h 15m

3310PL PHOTOLUMINESCENT

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (15.6cm)

MODES//
High / Low / Flashing
(flashlight body glows in the dark)

(Photoluminescent)



LUMENS	234	UP TO
190h		

STEALTHLITE™ 2410 LED

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS
	126
SAFETY CERTIFIED	RUN TIME
	7h 30m

STEALTHLITE™ 2450



LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
NIMH (included)

LENGTH//
6.5" (16.5cm)

CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED	LUMENS
	35
SAFETY CERTIFIED	RUN TIME
	3h 30m

3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (15.6cm)

INCLUDES//
3310PL and Wall Mountable Case
(flashlight body glows in the dark)

(Photoluminescent)



LUMENS	234	UP TO
190h		

STEALTHLITE™ 2410PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, II, III D1



STEALTHLITE™ 2460



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI II, D2



3315

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (11.8cm)

CERTIFICATIONS//
CI II III, D1



NEW



LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Pelican is also a leader of high performance lithium-ion technology in portable lighting.

LARGE LIGHTS

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

KINGLITE™ 4000

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
8 D Alkaline (not included)

LENGTH//
9.37" (23.8cm)

CERTIFICATIONS//
CI II, D2



9410L LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
8.75" (22.2 cm)

MODES//
High / Low / Flashing
Full Time Battery Indicator



NEW



9415 LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
8.75" (22.2cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing
Full Time Battery Indicator



NEW





TACTICAL LIGHTS

Pelican's tactical lights are field ready and built to withstand the hard knocks that come with the job. Intense, focused beams provides downrange visibility and peripheral lighting aids in situational awareness.

TACTICAL LIGHTS

M6 2320

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 CR123 Lithium-Ion (included)
LENGTH//
5.51" (14cm)



LUMENS
82
RUN TIME
1h 15m

M6 2330

LIGHT SOURCE//
LED
BATTERIES//
2 CR123 Lithium-Ion (included)
LENGTH//
5.51" (14cm)



LUMENS
100
RUN TIME
6h

2360 LED

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.2" (15.7cm)
MODES//
High / Strobe / Low



LUMENS
250
RUN TIME
19h

2350

LIGHT SOURCE//
LED
BATTERIES//
1 AA Alkaline (included)
LENGTH//
4.23" (10.7 cm)
MODES//
High / Strobe / Low



LUMENS
100
RUN TIME
15h

2370

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.43" (16.3cm)
MODES//
High / Low / Red / Blue



LUMENS
106
RUN TIME
41h 15m

NEW

2380

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.44" (16.4cm)
MODES//
High / Low / Spot To Flood



LUMENS
159
RUN TIME
13h

NEW

2380R

LIGHT SOURCE//
LED
BATTERIES//
Lithium-Ion (included)
LENGTH//
6.48" (16.5 cm)
MODES//
High / Strobe / Low
Spot To Flood



NEW

USB

LUMENS
305
RUN TIME
25h

M6 3W 2390

LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion (included)

LENGTH//
5.31" (13.5cm)



LUMENS
177
RUN TIME
2h 30m

PM6 3320

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 CR123 Lithium-Ion (included)

LENGTH//
5.27" (13.4cm)



LUMENS
81
RUN TIME
1h 30m

PM6 3330

LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion (included)

LENGTH//
5.27" (13.4cm)



LUMENS
90
RUN TIME
4h 45m

3390

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 CR123 Lithium (included)

LENGTH//
5.27" (13.4cm)



LUMENS
81
RUN TIME
1h 30m

7000

LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion

LENGTH//
5.31" (13.5 cm)

MODES//
High / Strobe / Medium / Low
Self Programmable



LUMENS
602
RUN TIME
1h 30m
UP TO

7060

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
8.65" (22cm)

MODES//
High / Strobe / Medium / Low
Self Programmable



LUMENS
368
RUN TIME
45h
UP TO

M10 8040

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 C Alkaline (not included)

LENGTH//
11.25" (28.6cm)

CERTIFICATIONS//
CI II III, D2



LUMENS
67
RUN TIME
5h 15m
SAFETY CERTIFIED

M11 8050

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
NiMH (included)

LENGTH//
11.25" (28.6cm)



LUMENS
164
RUN TIME
2h 15m



8060

LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
12.67" (32.2cm)

MODES//
High / Strobe / Medium / Low
Flashing / Self Programmable



LUMENS
803
RUN TIME
69h
UP TO



TACTICAL LIGHTS

HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.

HEADSUP LITE™ 2600

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.81" (9.7cm)

CERTIFICATIONS//
CI II III, D2



HEADSUP LITE™ 2610

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
1.49" (3.8cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low



HEADSUP LITE™ 2620

LIGHT SOURCE//
Incandescent (Xenon), LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.16" (5.5cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low



SAFETY CERTIFIED	LUMENS	UP TO
	26	
RUN TIME		UP TO
18h		

HEADSUP LITE™ 2640

LIGHT SOURCE//
Incandescent (Halogen), LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
2.63" (6.7cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Low



SAFETY CERTIFIED	LUMENS	UP TO
	29	
RUN TIME		UP TO
17h		

HEADSUP LITE™ 2680

LIGHT SOURCE//
Recoil™ LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
4.64" (11.8cm)

CERTIFICATIONS//
CI II III, D2



SAFETY CERTIFIED	LUMENS	UP TO
	79	
RUN TIME		UP TO
10h		

HEADSUP LITE™ 2690

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.81" (7.1 cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS	UP TO
	74	
RUN TIME		UP TO
11h		

2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.48" (6.3 cm)

MODES//
Variable Light Output / Spot to Flood /
Red Night Vision Friendly LEDs



SAFETY CERTIFIED	LUMENS	UP TO
	80	
RUN TIME		UP TO
175h		



2740 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low /
Flashing / Red LED



NEW

■ ■ (Translucent Blue)

SAFETY CERTIFIED	LUMENS	UP TO
	66	
RUN TIME		UP TO
21h		

2745 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing



NEW

2750 HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low / Flashing /
Red LED /
Low Battery Warning

■ ■ (Photoluminescent)



NEW

2755 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing /
Low Battery Warning



NEW

2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Medium / Low /
Downcast / Flashing/
Red LED / Full-time Battery
Level Indicator

■ ■ (Translucent Red)



NEW

2765 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing / Downcast



NEW

2780 HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6 cm)

MODES//
High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



NEW

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

2780R HEADLAMP



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
3.00" (7.6 cm)

MODES//
High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

■ □ ■ (Photoluminescent)
3 Interchangeable Covers Included



2785 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6 cm)

CERTIFICATIONS//
C1 D1

MODES//
High / Medium / Low /
Flashing / Downcast



RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) flashlights often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

RIGHT ANGLE LIGHTS

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

VERSABRITE™ 2250

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
3.87" (9.8cm)

CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED	LUMENS
	7
SAFETY CERTIFIED	RUN TIME
	5h 30m

LITTLE ED™ 3610

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.51" (19.1cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS
	126
SAFETY CERTIFIED	RUN TIME
	7h 30m

LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.51" (19.1cm)

CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED	LUMENS
	126
SAFETY CERTIFIED	RUN TIME
	7h 30m

LITTLE ED™ 3660



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
7.51" (19.1cm)

CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED	LUMENS
	112
SAFETY CERTIFIED	RUN TIME
	4h 30m

BIG ED™ 3700

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
4 C Alkaline (not included)

LENGTH//
7" (17.8cm)

MODES//
High / Backup

CERTIFICATIONS//
CI, D2



SAFETY CERTIFIED	LUMENS	UP TO
	39	
SAFETY CERTIFIED	RUN TIME	UP TO
	8h 30m	

BIG ED™ 3700PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
4 C Alkaline (not included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Backup



SAFETY CERTIFIED	LUMENS	UP TO
	39	
SAFETY CERTIFIED	RUN TIME	UP TO
	8h 30m	

RIGHT ANGLE LIGHTS

3715

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (not included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing / Downcast



3715PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (not included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing / Downcast



BIG ED™ 3750



LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
NiCad (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Backup



BIG ED™ 3750PL PHOTOLUMINESCENT SHROUD



LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
NiCad (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Backup



3765



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1(w/alkalines)/CI, D2

MODES//
High / Low / Flashing / Downcast



3765 PL PHOTOLUMINESCENT SHROUD



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1(w/alkalines)/CI, D2

MODES//
High / Low / Flashing / Downcast





RIGHT ANGLE LIGHTS

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

DIVE LIGHTS

Whether you'll be exploring underwater caves and crevices during daylight hours or the exhilarating adventure of a night dive, Pelican's Nemo line of dive lights will fill your needs. Designed to support depths up to 100 meters and built Pelican tough, you'll appreciate the reliability these underwater tools provide.



NEMO™ 1900N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
4.09" (10.4cm)

SUBMERSIBLE//100 Meters



LUMENS
11
RUN TIME
1h 30m

NEMO™ 2010N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
8.11" (20.6cm)

SUBMERSIBLE//
100 Meters



LUMENS
109
RUN TIME
32h

NEMO™ 2410N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7" (17.8cm)

SUBMERSIBLE//
100 Meters



LUMENS
126
RUN TIME
7h 30m

NEMO™ 1960N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
5.48" (13.9cm)

SUBMERSIBLE//100 Meters



LUMENS
24
RUN TIME
3h

NEMO™ 2400N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
6.49" (16.5cm)

SUBMERSIBLE//
100 Meters



LUMENS
45
RUN TIME
3h 45m

NEMO™ 4300N

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
8 C Alkaline (not included)

LENGTH//
7.5" (19cm)

SUBMERSIBLE//
100 Meters



LUMENS
175
RUN TIME
6h

NEMO™ 2000N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
3 C Alkaline (not included)

LENGTH//
7.79" (19.8cm)

SUBMERSIBLE//100 Meters



LUMENS
53
RUN TIME
5h



DIVE LIGHTS

SPECIALTY LIGHTS

Whether directing fighter jets on the decks of aircraft carriers or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available, magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

MINI FLASHER™ 2130

LIGHT SOURCE//
LED
BATTERIES//
2 L1154 Alkaline (included)
LENGTH//
1.73" (4.4 cm)



MINI FLASHER™ 2130IR

LIGHT SOURCE//
LED (infrared)
BATTERIES//
2 L1154 Alkaline (included)
LENGTH//
1.73" (4.4 cm)



2365 FLEX NECK

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (not included)
LENGTH//
21.92" (55.7cm)



LUMENS
65
RUN TIME
7h

2490 (WITH TRAFFIC WAND)

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (not included)
LENGTH//
12.5" (31.7 cm)



NEW

LUMENS
64
RUN TIME
12h



LIGHT MOUNTING SYSTEMS



CAT. NO. 610

FRONT SIGHT MOUNT

Fits Pelican Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



CAT. NO. 630

FOREGRIP MOUNT

Fits Pelican Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5




CAT. NO. 620

SIDE SLING MOUNT

Fits Pelican Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



CAT. NO. 2326



CAT. NO. 7006

REMOTE PRESSURE SWITCH

Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Pelican Lights: 2320, 2330, 2390 (Cat. No. 2326). 7000 (Cat. No. 7006).
COLOR: Black // WT.: 2.0 oz.

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

	CAT. NO. 2327 Nylon Holster	CAT. NO. 2357/2367 Nylon Holster	CAT. NO. 2377 Nylon Holster	CAT. NO. 2383 Nylon Holster	CAT. NO. 2407 Nylon Holster	CAT. NO. 7077 Plain Leather Holster	7078 Nylon Holster	CAT. NO. 7075 Basketweave Leather Holster	CAT. NO. 8057 Nylon Holster
HOLSTER STYLES +									
CAT NO.									
2300	•								
2320	•								
2330	•								
2360		•							
2370			•						
2380			•						
2380R				•					
2340/NVG		•							
2400/NVG					•				
2400PL					•				
2450					•				
2410					•				
2410PL					•				
2460					•				
7000	•								
7060						•	•	•	
8040									•
8050									•

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)



NEW PELICAN™ HELMET HOLDERS BY BLACK JACK™ FLASHLIGHT HOLDER

Tough aluminum mounts are built to hold the flashlight under the brim of the helmet, parallel to the line of sight of the user.
Cat. No. #780, 781, 782



NEW PELICAN™ HEAD STRAP RETAINERS BY BLACK JACK™

Set of four high temperature composite clips that utilize a 3M™ adhesive and will attach to any helmet.
CAT. No. 783

LIGHT AND HEADLIGHT HOLDER STYLES +

	CAT. NO. 700	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
CAT NO.							
2140		•					
2250	•	•					
2300		•					
2320			•				
2330			•				
2340/NVG		•	•				
2350							
2360							
2370							
2380/2380R							
2390			•				
2400/2400N/NVG/PL	•	•	•	•			
2410/PL	•	•	•				
2430	•	•	•	•			
2450	•	•	•	•			
2460	•	•		•			
3310			•			•	
3315			•			•	
3320			•		•		
3330			•		•		
7000					•		
All Headlamps							•

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

REMOTE AREA LIGHTING SYSTEMS +

CAT NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LEDs	LAMP HEADS	CERTIFICATIONS	COLORS
9000	4 AA Alkaline	1.14 lbs. (0.52)	8.0" (20.3)	200*, 100** 20***	4h*, 12h** 80h***	110°	2	1	N/A	■ ■
9420XL	Rechargeable Lithium ion	8.4 lbs. (3.8)	62.0" (157) ^A	1000*, 500***	2h*, 4h***	58°	2	1	N/A	■
9430	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) ^A	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ ■
9430SL	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) ^A	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
9435	Rechargeable NiMH	17.6 lbs. (7.98)	32.28" (82) ^A	1500*, 750***	5h*, 10h***	90°	18	1	CI, D2	■
9440	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8) ^A	5300*, 2800** 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■ ■
9460	Rechargeable, Sealed Lead Acid	55 lbs. (24.95)	70.87" (179.9) ^A	6000 (variable)	7h*, 40h***	120°	6 per head	2	N/A	■ ■
9460RS	Rechargeable, Sealed Lead Acid	58 lbs. (24.95)	70.87" (179.9) ^A	6000*, 500***	7h*, 40h***	120°	6 per head	2	N/A	■ ■
9470	Rechargeable, Sealed Lead Acid	88.18 lbs. (40)	72.85" (185) ^A	12,000 (variable)	7h*, 40h***	120°	6 per head	4	N/A	■ ■
9470RS	Rechargeable, Sealed Lead Acid	104 lbs. (40)	72.85" (185) ^A	12000*, 4000***	7h*, 40h***	120°	6 per head	4	N/A	■ ■
9480	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3) ^A	4000*, 3000** 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■ ■
9490	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) ^A	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■ ■
9500	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant 120V	210° (diffused)	36	3	N/A	■

PELICAN LIGHTS SPECIFICATIONS

SMALL LIGHTS +

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
1810	4 LR 41 Alkaline (included)	0.5 oz. (0.01)	1.5" (3.8)	16	8h 30m	23	137	IPX4	N/A	■ ■ ■ ■ ■ ■
1830	3 AAAA Alkaline (included)	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■ ■
1900	2 AAA Alkaline (included)	1.6 oz. (0.05)	4.09" (10.4)	11	1h 30m	45	571	IPX7	CI, D1/CI, D2	■ ■ ■ ■ ■ ■
1910	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	72* 14***	1h 45m* 4h***	64* 28***	1031* 198***	IPX7	N/A	■ ■ ■ ■ ■ ■
1920	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	120* 12***	2h 45m* 8h 30m***	87* 27***	1893* 184***	IPX7	N/A	■ ■ ■ ■ ■ ■
1930	4 LR 44 Alkaline (included)	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CI, D2	■ ■
1965	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	21	4h	51	756	IPX7	CI II III, D1	■ ■
2140	2 AAA Alkaline (included)	1.8 oz. (0.05)	3.5" (8.9)	13	2h	84	1761	IPX7	CI, D2	■
2220	2 CR2032 Lithium (included)	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■ ■ ■ ■ ■ ■ ■ ■ ■ (translucent)
2220NV	2 CR2032 Lithium (included)	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■
2300	2 AA Alkaline (included)	3.4 oz. (0.1)	5.62" (14.3)	11	4h 30m	43	478	IPX4	CI, D1/CI, D2	■ ■
2340	2 AA Alkaline (not included)	3.5 oz. (0.1)	6.25" (15.9)	10	4h 30m	43	461	IPX4	CI II, D2	■ ■

*High | **Medium | ***Low | ****Downcast | ^A Extended Height | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
MEDIUM LIGHTS +	1800	2 C Alkaline (not included)	7.8 oz. (0.22)	6" (15.2)	21	7h	131	4370	IPX7	CI II, D2	■ ■ ■
	1820	2 C Alkaline (included)	8.3 oz. (0.24)	5.83" (14.8)	22	6h 45m	146	5466	IPX7	CI II III, D2	■ ■ ■
	2000	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CI, D2	■ ■ ■
	2000PL	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CI, D2	■
	2010	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	109	32h	144	5189	IPX7	CI II III, D1	■ ■
	2010PL	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	109	32h	144	5189	IPX7	CI II III, D1	■
	2020	3 C Alkaline (not included)	14.7 oz. (0.42)	8.75" (22.2)	75	6h 30m	113	3211	IPX7	CI, D1	■ ■
	2400	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CI, D2	■ ■ ■ ■
	2400PL	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CI, D2	■
	2410	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	126	7h 30m	161	6500	IPX7	CI II III, D1	■ ■
	2410PL	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	126	7h 30m	161	6500	IPX7	CI II III, D1	■
	2430	4 AA Alkaline (included)	6.1 oz. (0.17)	6.5" (16.5)	70	2h 15m	104	2766	IPX4	CI, D2	■ ■
	2450	Rechargeable NiMH (included)	7.8 oz. (0.22)	6.5" (16.5)	35	3h 30m	122	3735	IPX7	CI II, D2	■ ■
	2460	Rechargeable NiMH (included)	7.8 oz. (0.22)	7" (17.8)	112	4h 30m	153	5828	IPX7	CI II, D2	■ ■
	3310PL	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	234*, 28***	8.75h 45m*, 190h***	240*, 81***	14500*, 1649***	IPX7	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	234*, 28***	8h 45m*, 190h***	240*, 81***	14500*, 1649***	IPX7	N/A	■ (photoluminescent)
3315	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	110	19h	164	6698	IPX7	CI II III, D1	■ ■	
LARGE LIGHTS +	4000	8 D Alkaline (not included)	74.08 oz. (2.1)	9.37" (23.8)	249	11h	106	3168	IPX7	CI II, D2	■ ■ ■
	9410L	Rechargeable Lithium-Ion (included)	44.7 oz. (1.27)	8.75" (22.2)	1203*, 553***	4h 30m*, 10h 30m***	430*, 287***	46,328*, 20,616***	IPX4	N/A	■ ■
TACTICAL LIGHTS +	9415	Rechargeable NiMH (included)	49.3 oz. (1.4)	8.75" (22.2)	413*, 159***	4h 30m*, 12h***	325*, 201***	26352*, 10076***	IPX4	CI, D1	■
	2320	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.51" (14)	82	1h 15m	145	5260	IPX4	N/A	■
	2330	2 CR123 Lithium (included)	5.5 oz. (0.16)	5.51" (14)	100	6h	93	2184	IPX4	N/A	■
	2350	1 AA Alkaline (included)	3.4 oz. (0.1)	4.2" (10.7)	100*, 10***	1h 45m*, 15h***	141*, 44***	5018*, 493***	IPX7	N/A	■
	2360	2 AA Alkaline (included)	5.4 oz. (0.15)	6.2" (15.7)	250*, 24***	2h 15m*, 19h***	151*, 45***	5692*, 512***	IPX7	N/A	■
	2370	2 AA Alkaline (included)	6.5 oz. (0.18)	6.43" (16.3)	106*, 13***	3h 45m*, 41h 15m***	158*, 52***	6283*, 684***	IPX4	N/A	■
	2380	2 AA Alkaline (included)	6.6 oz. (0.19)	6.44" (16.4)	159*, 23***	3h 15m*, 13h***	149*, 56***	5579*, 779***	IPX4	N/A	■
	2380R	Rechargeable Lithium-Ion (included)	6.6 oz. (0.19)	6.48" (16.5)	305*, 30***	3h 30m*, 25h***	159*, 50***	6317*, 613***	IPX7	N/A	■
2390	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.31" (13.5)	177	2h 30m	155	6002	IPX4	N/A	■ ■	

PELICAN LIGHTS SPECIFICATIONS

*High | **Medium | ***Low | ****Downcast | ^ Extended Height | Additional approvals may apply. For details go to www.pelican.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS	
TACTICAL LIGHTS +	3320	2 CR123 Lithium (included)	3.45 oz. (0.1)	5.27" (13.4)	81	1h 30m	131	4330	IPX4	N/A	■ ■ ■
	3330	2 CR123 Lithium (included)	3.45 oz. (0.1)	5.27" (13.4)	90	4h 45m	88	1959	IPX4	N/A	■ ■ ■
	7000	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.31" (13.5)	602*, 311**, 64***	1h 30m*, 2h**, 16h***	233*, 165**, 75***	13604*, 6830**, 1409***	IPX7	N/A	■
	7060	Rechargeable Lithium-Ion (included)	10.4 oz. (0.29)	8.65" (22)	368*, 150**, 18***	3h*, 9h**, 45h***	199*, 125**, 43***	9953*, 3922**, 473***	IPX4	N/A	■
	8040	4 C Alkaline (not included)	18.4 oz. (0.52)	11.25" (28.6)	67	5h 15m	198	9820	IPX4	CI II III, D2	■ ■
	8050	Rechargeable NiMH (included)	17.92 oz. (0.51)	11.25" (28.6)	164	2h 15m	256	16448	IPX4	N/A	■ ■
	8060	Rechargeable NiMH (included)	23.2 oz. (0.66)	12.67" (32.2)	803*, 447**, 25***	2h 30m*, 4h**, 69h***	359*, 265**, 62***	32252*, 17492**, 958***	IPX4	N/A	■
HEAD LAMPS +	2600	4 AA Alkaline (included)	9.7 oz. (0.27)	3.81" (9.7)	18	3h 30m	27	203	IPX7	CI II III, D2	■
	2610	3 AAA Alkaline (included)	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1	■
	2620	3 AAA Alkaline (included)	4.8 oz. (0.14)	2.16" (5.5)	26*, 14***	2h 15m*, 18h**	44*, 29**	491*, 216**	IPX4	CI, D1	■
	2640	4 AA Alkaline (included)	10.9 oz. (0.31)	2.63" (6.7)	29*, 16***	2h 45m*, 17h**	46*, 20***	586*, 103***	IPX4	CI, D2	■
	2680	4 AA Alkaline (included)	9.7 oz. (0.27)	4.64" (11.8)	79	10h	123	3789	IPX7	CI II III, D2	■
	2690	3 AAA Alkaline (included)	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1	■
	2720	3 AAA Alkaline (included)	3.8 oz. (0.11)	2.48" (6.3)	80*, 5***	8h*, 175h***	56*, 15***	790*, 60***	IPX4	N/A	■
	2740	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■ ■ (translucent)
	2745	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IPX4	CI, D1	■ ■
	2750	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	193*, 63***	3h*, 11h***	98*, 58***	1250*, 591***	IPX4	N/A	■ ■ (photoluminescent)
	2755	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	72*, 34***	6h*, 15***	57*, 40***	807*, 404***	IPX4	C1, D1	■ ■
	2760	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	204*, 141**, 95***, 42****	2h*, 3h 15m**, 5h***, 11h****	111*, 80**, 59***, 19****	3065*, 1606**, 861***, 88****	IPX4	N/A	■ ■ (translucent)
	2765	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	105*, 104**, 65***, 33****	4h 15m*, 4h**, 6h 15m***, 9h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IPX4	C1, D1	■ ■
	2780	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	127*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ ■ (photoluminescent)
	2780R	Rechargeable Lithium-Ion (included)	250 oz. (7.09)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ ■ (photoluminescent)
2785	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	226*, 103**, 33***	5h 45m*, 20h**, 66h***	111*, 74**, 41***	3058*, 1372**, 417***	IPX7	CI, D1	■ ■	

*High | **Medium | ***Low | ****Downcast | ^ Extended Height | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
RIGHT ANGLE LIGHTS +	2250	2 AA Alkaline (included)	0.3 oz. (0.09)	3.87" (9.8)	7	5h 30m	54	726	IPX4	CI II, D2	■
	3610	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	126	7h 30m	161	6500	IPX7	CI II III, D1	■ ■
	3610PL	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	126	7h 30m	161	6500	IPX7	CI II III, D1	■
	3660	Rechargeable 4 AA NiMH (included)	10.56 oz. (0.3)	7.51" (19.1)	112	4h 30m	153	5828	IPX7	CI II, D2	■ ■
	3700	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51 (back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■
	3700PL	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51 (back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■
	3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	174*, 95***, 32****	4h 45m*, 8h 30m***, 31h****	278*, 175***, 28****	19389*, 8051***, 197****	IPX4	CI, D1	■ ■
	3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	174*, 95***, 32****	4h 45m*, 8h 30m***, 31h****	278*, 175***, 28****	19389*, 8051***, 197****	IPX4	CI, D1	■
	3750	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133* , 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■
	3750PL	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133* , 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■
	3765	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	172*, 94***, 32****	3h 15m*, 5h 15m***, 14h****	274*, 181***, 28****	18784*, 8232***, 192****	IPX4	CI, D1/CI, D2 (w/alkalines)	■ ■
	3765PL	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	172*, 94***, 32****	3h 15m*, 5h 15m***, 14h 30m****	274*, 181***, 28****	18784*, 8232***, 192****	IPX4	CI, D1/CI, D2 (with/alkalines)	■
DIVE LIGHTS +	1900N	2 AAA Alkaline (included)	1.6 oz. (0.05)	4.09" (10.4)	11	1h 30m	45	571	IPX8	N/A	■ ■ ■
	1960N	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	24	3h	51	657	IPX8	N/A	■ ■ ■
	2000N	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX8	N/A	■ ■ ■
	2010N	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	109	32h	144	5189	IPX8	N/A	■ ■ ■
	2400N	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX8	N/A	■ ■ ■
	2410N	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	126	7h 30m	161	6500	IPX8	N/A	■ ■ ■
	4300N	8 C Alkaline (not included)	36.64 oz. (1.04)	7.5" (19)	175	6h	143	5222	IPX8	N/A	■ ■ ■
SPECIALTY LIGHTS +	2130	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2130IR	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	■

PELICAN LIGHTS SPECIFICATIONS

*High | **Medium | ***Low | ****Downcast | ^ Extended Height | Additional approvals may apply. For details go to www.pelican.com

CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs.

CUSTOM LABELS




GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



HOT STAMPING

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply

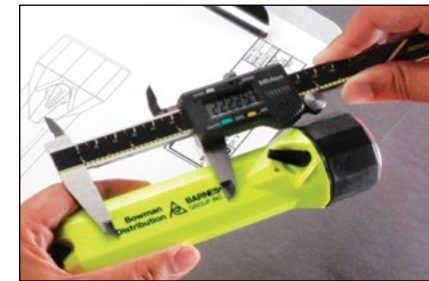

100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.

FLASHLIGHTS PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE

Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see <http://www.pelican.com/warranty>. In Australia: www.pelican.com/warranty/australia.

REMOTE AREA LIGHTING SYSTEMS PELICAN 1 YEAR LIMITED WARRANTY FOR RALS PRODUCTS

Pelican Products, Inc. guarantees to the original purchaser of its **RALS** products that its products will be free of defects in materials and workmanship for one year from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see <http://www.pelican.com/warranty>. In Australia: www.pelican.com/warranty/australia.

U.S.A.

CALIFORNIA

23215 Early Avenue
Torrance, CA 90505
Tel: 310.326.4700
800.473.5422
Fax: 310.326.3311
www.pelican.com

MASSACHUSETTS

147 North Main Street
South Deerfield, MA 01373
Tel: 800.542.7344
Fax: 413.665.8330
www.pelican.com

INTERNATIONAL

EUROPE, MIDDLE EAST AND AFRICA

Peli Products, S.L.U.
c/ Provença, 388, Planta 7
Barcelona, Spain, 08025
Tel: +34.934.674.999
Fax: +34.934.877.393
www.peli.com

JAPAN

Pelican Products K.K.
Nisso 22 Bldg 9F
1-11-10 Azabu Dai
Minato ward Tokyo
Japan 106-0041
Tel: +81.33.585.9100
Fax: +81.33.585.9109
www.pelican.com/jp

CANADA

Pelican Products ULC
10221-184th Street
Edmonton, Alberta
T5S 2J4, Canada
Tel: +780.481.6076
Fax: +780.481.9586
www.pelican.ca

AUSTRALIA

Pelican Products Pty Ltd
West Wing, Platinum Building, Suite 2.33
4 Ilya Av
Erina NSW 2250
Tel: +612.4367.7022
Fax: +612.4367.7066
www.pelicanaustralia.com

CHINA

Pelican Products China Representative Office
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel: +86.21.64189685
Fax: +86.21.64189679
www.pelican.com/cn

KOREA

Pelican Products Korea Ltd
#909 Hyundai 41 Tower, #2616
917-9, Mok-dong, Yangchon-gu, Seoul, Korea 158-050
Tel: +82.2.6092.4700
Fax: +82.2.6739.4700
www.pelican.com/ko

INDIA and SOUTH ASIA (Bangladesh, Bhutan, Maldives, Nepal, Sri Lanka)

Pelican Products and Services India Pvt. Ltd,
GF 9&10, Augusta Point
Sector-53, Golf Course Road
Haryana, Gurgaon 122002, India
Tel: +91.124.4377227
Fax: +91.124.4049227
www.pelican.com

SE ASIA and rest of ASIA (Hong Kong, Macau, Taiwan, Pakistan)

No.777, Pine City Building ZhaoJiaBang Road
#10-26 XuHui District
Shanghai, China 200032
Phone: +86.21.64189685
Fax: +86.21.64189679
www.pelican.com

LATIN AMERICA

23215 Early Avenue
Torrance, California 90505 USA
Tel: +1.310.326.4700 x 1462
Fax: +1.310.325.5740
www.pelican.com



©2015 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Lexan® is a registered trademark of SABIC. iOS is a registered trademark of Apple, Inc. BLUETOOTH is a registered trademark of Bluetooth Sig, Inc. Android is a trademark of Google Inc. BLACK JACK™ is a trademark of 1445 Designs Corporation. 3M is a trademark of 3M Company

DISTRIBUTED BY: